

E

eTERMINAL C190

Windows Touch Screen POS System

E-Terminal C190 radiates in its new design – featuring an ultra-slim and sleek look that exhibits elegance. Dual hinge design for easy adjustment and fit into any environment.

Features



Dual hinge design
(Low, flat & upright position)



Fanless, rugged die-cast aluminium chassis




Efficient cable management



VESA mounting standard



Energy efficient power supply

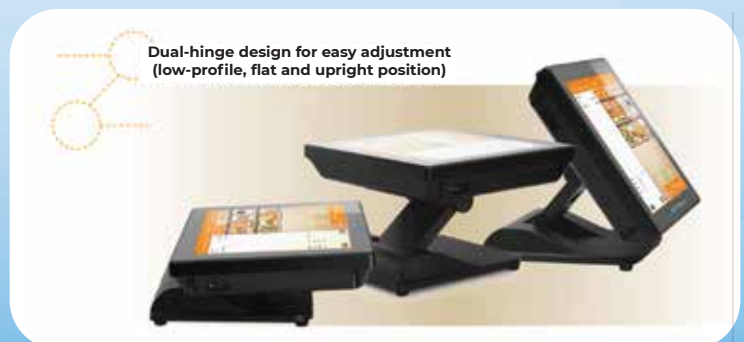

Specifications

E-Terminal C190

SYSTEM CONFIGURATION

| | |
|-----------------------------|--|
| Intel® Processor | 8th Intel® Core™ i3-8145U CPU (4M Cache, up to 3.90 GHz) 8th Intel® Core™ i5-8257U CPU (6M Cache, up to 3.90 GHz) |
| Memory | DDR4 SO-DIMM x 2, Default 4G, max. 32GB |
| Storage | SATA 2.5" hard drives (HDD) or flash storage (SSD) |
| Power Supply | DC12V/5~6A external power adapter. AC100 to 240V full range. |
| O/S Compatibility | Windows 10 IoT, Linux |
| Physical Dimensions (W*H*D) | Width: 372mm / Height: 310mm (full extended); 280mm (low-profile); 127mm (folded-flat) / Stand depth: 250mm |
| System Weight (with stand) | 6.1Kg / 3.6Kg (without stand) |
| Package Dimensions | 50.5(L) X 44.5(W) X 23(H) cm / 8.2Kg |
| Wall Mount | VESA 100X100mm compliant |
| Product Certification | Storage Temperature -25°C to 70°C |
| Humidity | 15% ~ 80% |

LCD & TOUCH PANEL

| | |
|------------|---|
| Display | 15" LED-backlight display Brightness: 250~350 cd/m2 |
| Resolution | 6 port (2x USB 2.0, 4x USB 3.0) |
| Touch | Bezel Type Resistive Touch/Flat Type Resistive Touch / Flat Type Projected Capacitive Touch (PCAP) |

I/O CONNECTIVITY

| | |
|----------------|--|
| Parallel | 1 port DB-25 |
| USB | 1024 x 768 (default) |
| LAN | 1 PORT RJ-45 LAN WITH ACTIVITY AND LINK LEDS 10/100/1000 Gb Ethernet |
| SERIAL | 6 x DB-9 (COM1&2 Support 5V/12V By Jumper) |
| Cash Drawer | N/A |
| Audio | HD Audio, 3W Speaker, 1x Line out, 1x Mic in |
| HDMI | 1 port |
| VGA | 1 port DB-15 |
| DC12V out Jack | 1 port DC+12v/1A for P2 + Monitor |
| PS/2 | N/A |
| Extension Slot | Slot x1 |

OPTION

| | |
|------------------|---|
| 2nd Display | 9.7"/14.1"/ 15" LED LCD Panel , 1024 x 768 Resolution , Optional: Touch |
| MSR | MR100 : 2 or 3 Tracks , USB Interface |
| Customer Display | 9mm VFD , USB Interface |
| WiFi | WiFi 802.11 b/g/n. |
| RAID Card | RAID 1 Mode, 2nd HDD or SSD |
| Wall Mount | VESA 100 x 100mm, 75 x 75mm |

